

ARTICULIGHT

15-06 Morlot Avenue, Fair Lawn, NJ 07410 USA Tel: (201) 796-2690 Fax: (201) 796-8818

info@articulight.com


articulight@aol.com


www.articulight.com

LED SERIES

BRUTALED 6S

LED Spot Projector

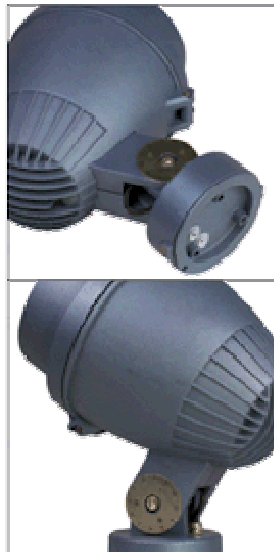

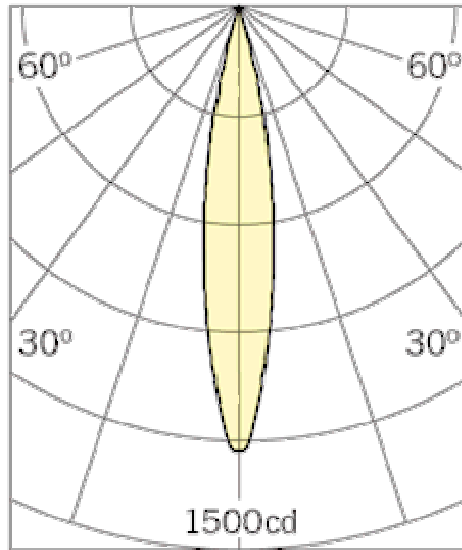

Designed for exterior, interior and entertainment applications and offering a long operating life of more than 50,000 hours, BRUTAED 6S features a light source of 6 1W high-power LEDs mounted beneath a glare eliminating 100mm diameter lens. Operating on 100-250V and drawing just 9W, BRUTALED 6S incorporates an internal radiator and fan to assist heat dissipation. BRUTALED 6S can be ground or wall mounted, and the axis rotation can be adjusted and locked after the base is fixed, and the fixture has a scale angle plate on the tilt bracket to enable precise projecting of the beam.

Operating on significantly lower wattages than conventional lights, the individual power and colors of the high quality 1W LEDs provide the BRUTALED Series with the means and flexibility to excel in any open area or spot illumination scheme. IP rating: 65 <http://articulight.com/acc/IPRatings.html> .

TECHNICAL SPECIFICATIONS	
Light Source:	6 x 1 watt
Projecting Distance:	78 lux @ 4 meters
LED Life:	> 50,000 hours
Power Consumption:	9 watts
Mains Connection Method:	Hard Wired Connections
Control Connection	3 pin XLR-Mini (Color Change Versions only)

Method:	
Housing Material:	Die cast Aluminum
Diffuser Material:	Toughened Glass
Weight:	2.6 kg
IP rate Object:	6 = Totally protected against dust
IP rate Liquid:	5 = Protected against low pressure jets if water from all directions - limited ingress permitted
Voltages:	90-250v AC

TYPICAL APPLICATIONS

Feature Lighting
Retail Display
Industrial Applications
Functional Lighting
Street Lighting
Amenity Lighting
Cruise & Ferry Ships
Shopping Malls

BEAM ANGLE

15 degrees


FEATURES

Die Cast Aluminum Body
Toughened Glass Diffuser
Scale angle plate on the tilt bracket to facilitate the precise setting of the beam

EFFECTS

Precise Pin Pointing

DIMENSIONS IN MM

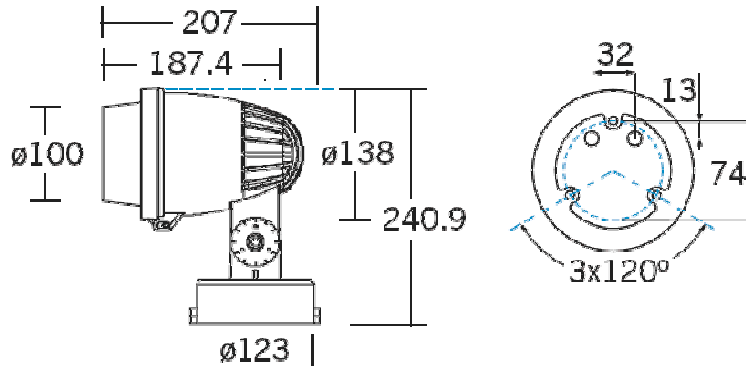


MODELS
BR-60013/WW = 6 1W LED Spot Warm White
BR-60013/PW = 6 1W LED Spot Pure White
BR-60023 = 6 1W LED Spot White/Yellow mix
BR-60033 = 6 1W LED Spot Amber/White/Blue mix
BR-60043 = 6 1W LED Spot RGB

DUE TO CONTINUOUS IMPROVEMENTS, SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE.

BRUTALED 21S
LED Spot Projector



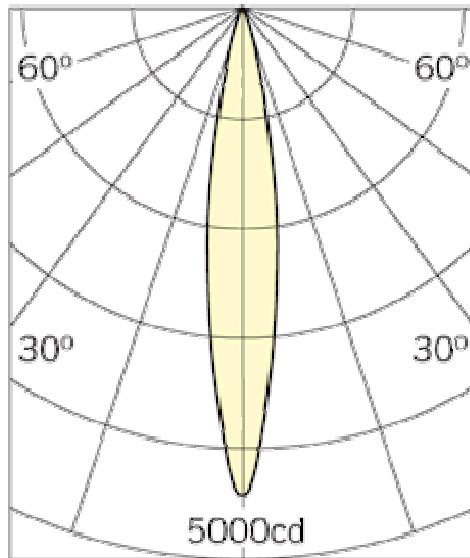

CE UL    IP65

Featuring a high-power light source of 21 1W LEDs beneath a 165mm diameter, glare eliminating lens, BRUTALED 21S draw just 32W in operation and are designed for concentrated and symmetrical distributed beam applications. BRUTALED 21S utilizes an internal radiator and fan to aid heat dissipation. Offering a long, maintenance free LED life BRUTALED 21S is robustly engineered with auxiliary mounting accessories allowing the fixture to be wall or ground positioned. The fixture has a clearly marked angle plate on the tilt bracket to facilitate precise beam setting and uniform directing of multiple fixtures. Operating on significantly lower wattages than conventional lights, the individual power and colors of the high quality 1W LEDs provide the BRUTALED Series with the means and flexibility to excel in any open area or spot illumination scheme. IP rating 65


<http://articulight.com/acc/IPRatings.html>

TECHNICAL SPECIFICATIONS	
Light Source:	21 x 1 watt
Projecting Distance:	78 lux @ 4 meters
LED Life:	> 50,000 hours
Power Consumption:	26 watts
Mains Connection Method:	Hard Wired Connections
Control Connection Method:	3 pin XLR-Mini (Color Change Versions only)
Housing Material:	Die cast Aluminum
Diffuser Material:	Toughened Glass
Weight:	2.6 kg
IP rate Object:	6 = Totally protected against dust
IP rate Liquid:	5 = Protected against low pressure jets if water from all directions - limited ingress permitted
Voltages:	90-250v AC

TYPICAL APPLICATIONS
Feature Lighting
Retail Display
Industrial Applications
Functional Lighting
Street Lighting
Amenity Lighting
Cruise & Ferry Ships
Shopping Malls

BEAM ANGLE
16 degrees



DIMENSIONS IN MM

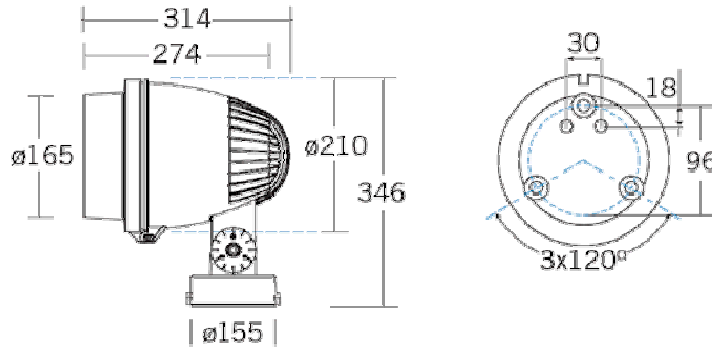

MODELS
BR-60063/WW = 21 1W LED Spot Warm White
BR-60063/PW = 21 1W LED Spot Pure White
BR-60063/CW = 21 1W LED Spot Cool White
BR-60073 = 21 1W LED Spot White/Yellow mix
BR-60083 = 2 1W LED Spot Amber/White/Blue mix
BR-60093 = 21 1W LED Spot RGB

DUE TO CONTINUOUS IMPROVEMENTS, SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE.

BRUTALED 36S
LED Spot Projector

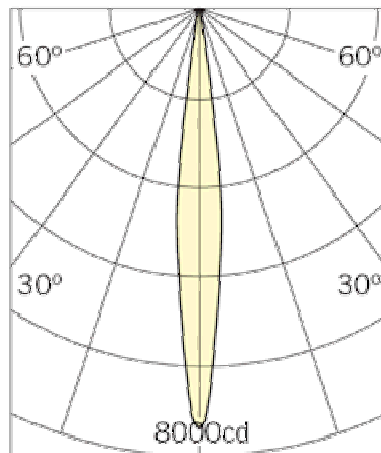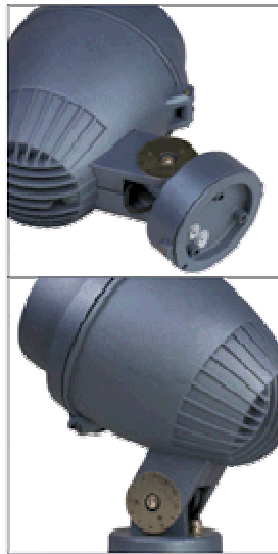



Rated IP65 <http://articulight.com/acc/IPRatings.html>, the BRUTALED 36S is designed for larger scale exterior and interior architectural spot lighting applications. Offering a long, maintenance free LED life , BRUTALED 36S is robustly engineered with auxiliary mounting accessories allowing the fixture to be wall or ground positioned. The fixture has a clearly marked angle plate on the tilt bracket to facilitate precise beam setting and uniform directing of multiple fixtures. Operating on significantly lower wattages than conventional lights, the individual power and colors of the high quality 1W LEDs provide the BRUTALED Series with the means and flexibility to excel in any open area or spot illumination scheme.

TECHNICAL SPECIFICATIONS	
Light Source:	36 x 1 watt
Projecting Distance:	450 lux @ 4 meters
LED Life:	> 50,000 hours
Power Consumption:	54 watts
Mains Connection Method:	Hard Wired Connections
Control Connection Method:	3 pin XLR-Mini (Color Change Versions only)
Housing Material:	Die cast Aluminum
Diffuser Material:	Toughened Glass
Weight:	9.2 kg
IP rate Object:	6 = Totally protected against dust
IP rate Liquid:	5 = Protected against low pressure jets if water from all directions - limited ingress permitted
Voltages:	90-250v AC

TYPICAL APPLICATIONS
Feature Lighting
Retail Display
Industrial Applications
Functional Lighting
Street Lighting
Amenity Lighting


Cruise & Ferry Ships

Shopping Malls

BEAM ANGLE

16 degrees

DIMENSIONS IN MM

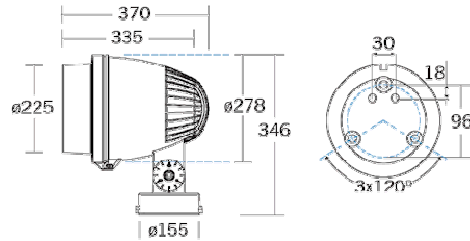

MODELS

BR-60153/WW = 36 x 1W LED Spot Warm White

BR-60153/PW = 36 x 1W LED Spot Pure White

BR-60153/CW = 36 x 1W LED Spot Cool White

BR-60163 = 36 x 1W LED Spot White/Yellow mix

BR-600173 = 36 x 1W LED Spot Amber/White/Blue mix

BR-600183 = 36 x 1W LED Spot RGB

DUE TO CONTINUOUS IMPROVEMENTS, SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE.